

Photon PM0025

Photovoltaic Module
Wattage: 25 Wp


Photon Energy Systems Limited

An ISO 9001:2000 Company




The module picture above is only indicative and may not depict the actual module

Electrical Parameters		
Model	PM0025	
Power – Pmax (Watts)	Nominal 25	
Voltage at Maximum Power – Vmp (Volts)	16.5	
Current at Maximum Power – Imp (Amps)	1.52	
Open Circuit Voltage – Voc (Volts)	20.0	
Short Circuit Current – Isc (Amps)	1.75	
Solar Cells per Module (Units)	36	
Type of Solar PV Cell	Mono / Multi / Ribbon	
Parent Solar Cell Size (mm)	100 Sq or 125 Sq or 125 PSq	
Dimensions and Weights:	Type 1	Type 2
Length (L) – mm	535	475
Width (W) – mm	475	535
Thickness (T) – mm	22	22
Weight – Kgs	3.35	3.35
Mounting Holes Pitch (Y) – mm	200	200
Mounting Holes Pitch (X) – mm	451	511
Area – Sq. Mtrs	0.25	0.25

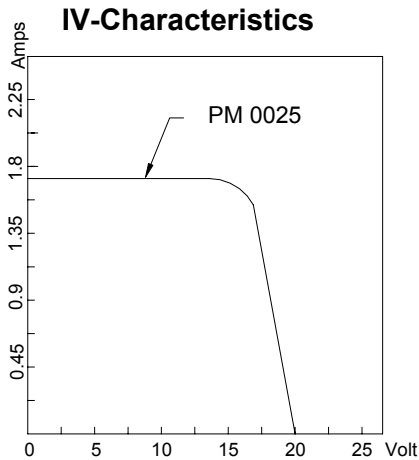


- Measurement Tolerance on Electrical Parameters $\pm 5\%$.
- All specified parameters are at STC 25°C cell, 100mW / cm² irradiance and AM 1.5.
- Our standard range of modules is supplied without blocking diodes. However, blocking diodes can be provided on specific customer request.
- Specifications subject to change without prior notice due to product up gradations.

Junction Box – JB2



50 x 40 x 10 mm
Two Terminals

Mounting Details

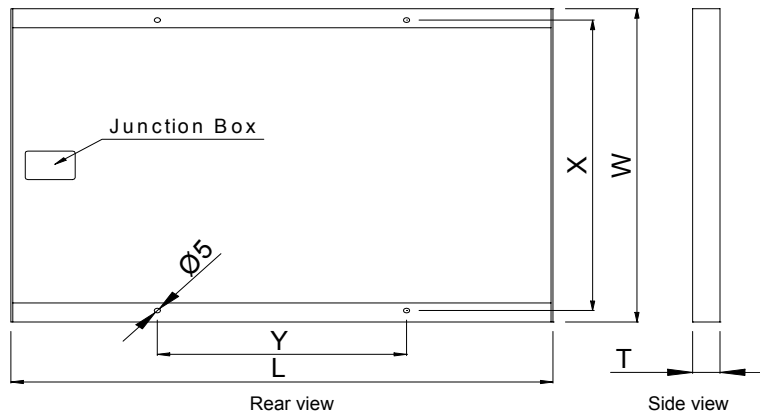

All dimensions are in mm and tolerances $\pm 2\text{mm}$